

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number
WO 03/105920 A1

(51) International Patent Classification⁷: **A61L 27/34**,
27/54, 31/10, 29/08

MN 55343 (US). **TRAN, Linh, V.** [US/US]; 7932 Oregon
Avenue North, Brooklyn Park, MN 55445 (US).

(21) International Application Number: PCT/US03/19343

(74) Agents: **GOLDMAN, Philip, M.** et al.; Fredrikson & By-
ron, P.A., 4000 Pillsbury Center, 200 South Sixth Street,
Minneapolis, MN 55402-1425 (US).

(22) International Filing Date: 18 June 2003 (18.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/175,212 18 June 2002 (18.06.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **SUR-
MODICS, INC.** [US/US]; 9924 West 74th Street, Eden
Prairie, MN 55344 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CHUDZIK,**
Stephen, J. [US/US]; 11 Heather Place, St. Paul, MN
55102 (US). **KLOKE, Timothy, M.** [US/US]; 11705
Shannon Court #122, Eden Prairie, MN 55344 (US).
LAWIN, Laurie, R. [US/US]; 3170 Bent Tree Hills
Drive, New Brighton, MN 55112 (US). **OFSTEAD,**
Ronald, F. [US/US]; 73 Belmont Lane East, Maplewood,
MN 55117 (US). **CHAPPA, Ralph, A.** [US/US]; 16260
Suel Lane, Prior Lake, MN 55372 (US). **HERGEN-
ROTHER, Robert, W.** [US/US]; 10423 Brown Farm
Circle, Eden Prairie, MN 55347 (US). **ANDERSON,**
Aron, B. [US/US]; 4847 Birchwood Lane, Minnetonka,

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND SYSTEM FOR PROVIDING BIOACTIVE AGENT RELEASE COATING

(57) Abstract: A coating composition, and method of applying such a composition under conditions of controlled humidity, for use in coating device surfaces to control and/or improve their ability to release bioactive agents in aqueous systems. The coating composition is particularly adapted for use with medical devices that undergo significant flexion and/or expansion in the course of their delivery and/or use, such as stents and catheters. The composition includes the bioactive agent in combination with a combination of a first polymer component such as poly(alkyl(meth)acrylate), poly(aryl(meth)acrylate), poly(alkyl(meth)acrylate), or poly(alkyl(meth)acrylate) and a second polymer component such as poly(ethylene-co-vinyl acetate).



WO 03/105920 A1

METHOD AND SYSTEM FOR PROVIDING BIOACTIVE AGENT RELEASE COATING

CROSS REFERENCE TO RELATED APPLICATIONS

The present application claims priority to US patent application filed June 18, 2002 and assigned Serial No. 10/175,212 which is a continuation in part of US patent
5 application filed November 11, 2001 and assigned Serial No. 09/989,033 which is a
divisional of US patent application filed October 20, 2000 and assigned Serial No.
09/693,771, which is a divisional of US patent application filed April 15, 1999 and
assigned Serial No. 09/292,510, which is a continuation-in-part of provisional US
patent application filed April 27, 1998 and assigned Serial No. 60/083,135, the entire
10 disclosure of which is incorporated herein by reference.

TECHNICAL FIELD

In one aspect, the present invention relates to a process of treating implantable
medical devices with coating compositions to provide the release of bioactive (e.g.,
15 pharmaceutical) agents from the surface of the devices under physiological
conditions. In another aspect, the invention relates to the coating compositions, *per se*,
and to devices or surfaces coated with such compositions. In yet another aspect, the
invention relates to methods of coating compositions on devices.

BACKGROUND OF THE INVENTION

20 Many surgical interventions require the placement of a medical device into the
body. While necessary and beneficial for treating a variety of medical conditions, the
placement of metal or polymeric devices in the body gives rise to numerous
complications. Some of these complications include: increased risk of infection;
initiation of a foreign body response resulting in inflammation and fibrous
25 encapsulation; and initiation of a wound healing response resulting in hyperplasia and
restenosis. These, and other complications must be dealt with when introducing a
metal or polymeric device into the body.

One approach to reducing the potential harmful effects of such an introduction
is to attempt to provide a more biocompatible implantable device. While there are

several methods available to improve the biocompatibility of implantable devices, one method which has met with limited success is to provide the device with the ability to deliver bioactive compounds to the vicinity of the implant. By so doing, some of the harmful effects associated with the implantation of medical devices can be
5 diminished. Thus, for example, antibiotics can be released from the surface of the device to minimize the possibility of infection, and anti-proliferative drugs can be released to inhibit hyperplasia. Another benefit to the local release of bioactive agents is the avoidance of toxic concentrations of drugs which are sometimes necessary, when given systemically, to achieve therapeutic concentrations at the site where they
10 are needed.

Although the potential benefits expected from the use of medical devices capable of releasing pharmaceutical agents from their surfaces is great, the development of such medical devices has been slow. This development has been hampered by the many challenges that need to be successfully overcome when
15 undertaking said development. Some of these challenges are: 1) the requirement, in some instances, for long term release of bioactive agents; 2) the need for a biocompatible, non-inflammatory device surface; 3) the need for significant durability, particularly with devices that undergo flexion and/or expansion when being implanted or used in the body; 4) concerns regarding processability, to enable
20 the device to be manufactured in an economically viable and reproducible manner; and 5) the requirement that the finished device be sterilizable using conventional methods.

Several implantable medical devices capable of delivering medicinal agents have been described. Several patents are directed to devices utilizing biodegradable
25 or bioresorbable polymers as drug containing and releasing coatings, including Tang *et al* , U.S. Patent 4,916,193 and MacGregor, U.S. Patent 4,994,071. Other patents are directed to the formation of a drug containing hydrogel on the surface of an implantable medical device, these include Amiden *et al* , U.S. patent 5,221,698 and Sahatjian, U.S. Patent 5,304,121. Still other patents describe methods for preparing
30 coated intravascular stents via application of polymer solutions containing dispersed therapeutic material to the stent surface followed by evaporation of the solvent. This method is described in Berg *et al* , U.S. Patent 5,464,650.

However, there remain significant problems to be overcome in order to provide a therapeutically significant amount of a bioactive compound on the surface of the implantable medical device. This is particularly true when the coated composition must be kept on the device in the course of flexion and/or expansion of the device during implantation or use. It is also desirable to have a facile and easily processable method of controlling the rate of bioactive release from the surface of the device.

Although a variety of hydrophobic polymers have previously been described for use as drug release coatings, Applicant has found that only a small number possess the physical characteristics that would render them useful for implantable medical devices which undergo flexion and/or expansion upon implantation. Many polymers which demonstrate good drug release characteristics, when used alone as drug delivery vehicles, provide coatings that are too brittle to be used on devices which undergo flexion and/or expansion. Other polymers can provoke an inflammatory response when implanted. These or other polymers demonstrate good drug release characteristics for one drug but very poor characteristics for another.

Some polymers show good durability and flexibility characteristics when applied to devices without drug, but lose these favorable characteristics when drug is added. Furthermore, often times the higher the concentration of drugs or the thicker the application of polymer to the device surface, the poorer the physical characteristics of the polymer become. It has been very difficult to identify a polymer which provides the proper physical characteristics in the presence of drugs and one in which the drug delivery rate can be controlled by altering the concentration of the drug in the polymer or the thickness of the polymer layer.

Applicants have previously provided an implantable medical device that can undergo flexion and/or expansion upon implantation, and that is also capable of delivering a therapeutically significant amount of a pharmaceutical agent or agents from the surface of the device. Applicant's issued US Patent Nos. 6,214,901 and 6,344,035 and published PCT Application No. WO 00/55396, as well as above-captioned copending US Serial No. 09/989,033, provide a coating composition that comprises at least one polyalkyl(meth)acrylate, as a first polymeric component and poly(ethylene-co-vinyl acetate) ("pEVA") as a second polymeric component, and

describe the use of such compositions for coating an implant surface using any suitable means, e.g., by dipping, spraying and the like.

Various other references relate to the use of coatings to provide implantable medical devices with bioactive agents. See, for instance, US 20020007213, and
5 published PCT Application Nos. WO 200187372, WO 200187373, WO 200187374, WO 200187375, WO 200187376, WO 200226139, WO 200226271, WO 200226281, WO 200187342, and WO 200187263

BRIEF DESCRIPTION OF THE DRAWING

10 In the Drawing:

Figure 1 provides a plot showing the experimental results described in Example 3.

Figure 2 provides a plot showing the experimental results described in Example 4.

15 Figure 3 provides a plot showing the experimental results described in Example 5.

SUMMARY OF THE INVENTION

The term "coating composition", as used herein, will refer to one or more
20 vehicles (e.g., a system of solutions, mixtures, emulsions, dispersions, blends etc.) used to effectively coat a surface with bioactive agent, first polymer component and/or second polymer component, either individually or in any suitable combination. In turn, the term "coated composition" will refer to the effective combination, upon a surface, of bioactive agent, first polymer component and second polymer component,
25 whether formed as the result of one or more coating vehicles, or in one or more layers.

The present invention provides a coating composition, and related method for using the coating composition to coat a surface with a bioactive agent, for instance to coat the surface of an implantable medical device in a manner that permits the surface to release the bioactive agent over time when implanted *in vivo*.

30 In a preferred embodiment, the coating composition comprises a bioactive agent in combination with a plurality of polymers, including a first polymer component comprising at least one polyalkyl(meth)acrylate or aromatic

poly(meth)acrylate and a second polymer component comprising poly(ethylene-co-vinyl acetate). In a further preferred embodiment, the device is a medical device that undergoes flexion and/or expansion in the course of implantation or use *in vivo*.

Applicants have discovered the manner in which the inclusion of one or more aromatic poly(meth)acrylates as the first polymeric component, permit the use of a
5 broad array of bioactive agents, particularly in view of the use of a corresponding broad array of solvents. For instance, such compositions of this invention permit the inclusion of polar bioactive agents, by the use of solvents and solvent systems that are themselves considerably more polar than typically used.

10 In one such an embodiment, the composition preferably comprises at least one first polymeric component selected from the group consisting of polyaryl(meth)acrylates, polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates. Such terms are used to describe polymeric structures wherein at least one carbon chain and at least one aromatic ring are
15 combined with acrylic groups, typically esters, to provide a composition of this invention. For instance, and more specifically, a polyaralkyl(meth)acrylate or polyarylalkyl(meth)acrylate can be made from aromatic esters derived from alcohols also containing aromatic moieties.

In a further preferred embodiment, the method of coating a device comprises
20 the step of applying the composition (including layers or components thereof) to the device surface under conditions of controlled relative humidity (at a given temperature), for instance, under conditions of increased or decreased relative humidity as compared to ambient humidity.

Humidity can be "controlled" in any suitable manner, including at the time of
25 preparing and/or using (as by applying) the composition (for instance, by coating the surface in a confined chamber or area adapted to provide a relative humidity different than ambient conditions), and/or by adjusting the water content of the coating or coated composition itself. In turn, even ambient humidity can be considered
"controlled" humidity for purposes of this invention, if indeed it has been correlated
30 with and determined to provide a corresponding controlled bioactive release profile.

Moreover, and particularly when coating a plurality of coating compositions (including components thereof) in the form of a corresponding plurality of layers,

humidity can be controlled in different ways (e.g., using a controlled environment as compared to a hydrated or dehydrated coating composition) and/or at different levels to provide a desired release profile for the resulting composite composition coating. As described and exemplified below, a resultant composition can be coated using a plurality of individual steps or layers, including for instance, an initial layer having only bioactive agent (or bioactive agent with one or both of the polymeric components), over which are coated one or more additional layers containing suitable combinations of bioactive agent, first polymeric component and/or second polymeric component, the combined result of which is to provide a coated composition of the invention. In turn, and in a particularly preferred embodiment, the invention further provides a method of reproducibly controlling the release (e.g., elution) of a bioactive agent from the surface of a medical device implanted *in vivo*, the method comprising the step of coating the device with a coating composition comprising the bioactive agent under conditions of controlled humidity. Applicants have discovered that coating compositions of this invention under conditions of increased humidity will typically accelerate release of the bioactive agent *in vivo*, while decreasing humidity levels will tend to decelerate release. The controlled humidity can be accomplished by any suitable means, e.g., by controlling humidity in the environment during the coating process and/or by hydrating the coating composition itself.

Moreover, a plurality of coating compositions and corresponding coating steps can be employed, each with its own controlled humidity, in order to provide a desired combination of layers, each with its corresponding release profile. Those skilled in the art will appreciate the manner in which the combined effect of these various layers can be used and optimized to achieve various effects *in vivo*.

While not intending to be bound by theory, the release kinetics of the bioactive agent *in vivo* are thought to generally include both a short term ("burst") release component, within the order of minutes to hours or less after implantation, and a longer term release component, which can range from on the order of hours to days or even months of useful release. As used herein, the "acceleration" or "deceleration" of bioactive release can include either or both of these release kinetics components.

In yet another embodiment, the present invention comprises a method for selecting an optimal release rate from a coated composition, the method comprising

the steps of coating sample surfaces at a plurality of different humidity levels and evaluating the corresponding release profiles to determine a controlled humidity level corresponding to a desired profile. In a related embodiment, the invention provides a chamber for use in coating a medical device with a coating composition of the present invention under conditions of controlled humidity.

In one such embodiment, for instance, the coating composition is coated onto the device under relative humidity controlled at a level of between about 0% and about 95 % relative humidity (at a given temperature, between about 15°C and 30°C), and more preferably between about 0% and about 50% relative humidity. Without intending to be bound by theory, Applicants have found that potential differences in the ambient humidity, as between coating runs at the same location, and/or as between different coating locations, can vary significantly, and in a manner that might affect such properties as the release or elution of the bioactive agent. By using a controlled humidity, Applicants can provide a coating in a manner that is significantly more controllable and reproducible.

Additionally, the ability to coat a device in the manner of the present invention provides greater latitude in the composition of various coating layers, e.g., permitting more or less of the aromatic poly(meth)acrylate and/or polyalkyl(meth)acrylate to be used in coating compositions used to form different layers (e.g., as a topcoat layer). This, in turn, provides the opportunity to further control release and elution of the bioactive agent from the overall coating.

A coating composition can be provided in any suitable form, e.g., in the form of a true solution, or fluid or paste-like emulsion, mixture, dispersion or blend. In turn, the coated composition will generally result from the removal of solvents or other volatile components and/or other physical-chemical actions (e.g., heating or illuminating) affecting the coated composition *in situ* upon the surface.

In an alternative embodiment the coated composition can further comprise at least one polyalkyl(meth)acrylate, as a first polymeric component, and poly(ethylene-co-vinyl acetate) ("pEVA") as a second polymeric component. A particularly preferred polymer mixture for use in this invention includes mixtures of poly(n-butyl methacrylate) ("pBMA") and poly(ethylene-co-vinyl acetate) co-polymers (pEVA). This mixture of polymers has proven useful with absolute polymer concentrations

(i.e., the total combined concentrations of both polymers in the coating composition), of between about 0.05 and about 70 percent (by weight of the coating composition). In one preferred embodiment the polymer mixture includes a polyalkyl(meth)acrylate (such as poly(n-butyl methacrylate)) with a weight average molecular weight of from
5 about 100 kilodaltons to about 1000 kilodaltons and a pEVA copolymer with a vinyl acetate content of from about 20 to about 40 weight percent.

In a particularly preferred embodiment the polymer mixture includes a polyalkyl(meth)acrylate (e.g., poly(n-butyl methacrylate)) with a molecular weight of from about 200 kilodaltons to about 500 kilodaltons and a pEVA copolymer with a
10 vinyl acetate content of from about 30 to about 34 weight percent. The concentration of the bioactive agent or agents dissolved or suspended in the coating mixture can range from about 0.01 to about 90 percent, by weight, based on the weight of the final coating composition.

Coating compositions comprising aromatic poly(meth)acrylates provide
15 unexpected advantages in certain applications, even as compared to coating compositions that instead employ only polyalkyl(meth)acrylates. Such advantages relate, for instance, to the ability to provide coatings with different characteristics (e.g., different solubility characteristics) than other coatings (e.g., those that include a polyalkyl(meth)acrylate component), while maintaining an optimal combination of
20 other desired properties. Without intending to be bound by theory, it would appear that the increased solubility (particularly in more polar solvents) that is provided by an aromatic, rather than alkyl poly(meth)acrylate of this invention, permits the use of poly(ethylene-co-vinyl acetate) components that are themselves more polar (e.g., having significantly greater vinyl acetate concentrations) than those typically
25 preferred for use with the polyalkyl(meth)acrylates.

Suitable polymers, and bioactive agents, for use in preparing coating compositions of the present invention can be prepared using conventional organic synthetic procedures and/or are commercially available from a variety of sources, including for instance, from Sigma Aldrich (e.g., 1,3-dioxolane, vincristine sulfate,
30 and poly(ethylene-co-vinylacetate), and Polysciences, Inc, Warrington, PA (e.g., polybenzylmethacryate and poly(methyl methacrylate-co-n-butyl methacrylate). Optionally, and preferably, such polymer components are either provided in a form

suitable for *in vivo* use, or are purified for such use to a desired extent (e.g., by removing impurities) by conventional methods available to those skilled in the art.

The coating composition and method can be used to control the amount and rate of bioactive agent (e.g., drug) release from one or more surfaces of implantable medical devices. In a preferred embodiment, the method employs a mixture of hydrophobic polymers in combination with one or more bioactive agents, such as a pharmaceutical agent, such that the amount and rate of release of agent(s) from the medical device can be controlled, e.g., by adjusting the relative types and/or concentrations of hydrophobic polymers in the mixture. For a given combination of polymers, for instance, this approach permits the release rate to be adjusted and controlled by simply adjusting the relative concentrations of the polymers in the coating mixture.

A preferred coating composition of this invention includes a mixture of two or more polymers having complementary physical characteristics, and a pharmaceutical agent or agents applied to the surface of an implantable medical device which undergoes flexion and/or expansion upon implantation or use. The applied coating composition is cured (e.g., solvent evaporated) to provide a tenacious and flexible bioactive-releasing composition on the surface of the medical device. The complementary polymers are selected such that a broad range of relative polymer concentrations can be used without detrimentally affecting the desirable physical characteristics of the polymers. By use of the polymer mixtures of the invention the bioactive release rate from a coated medical device can be manipulated by adjusting the relative concentrations of the polymers.

25

DETAILED DESCRIPTION OF THE INVENTION

In a particularly preferred embodiment, the present invention relates to a coating composition and related method for coating an implantable medical device which undergoes flexion and/or expansion upon implantation. The structure and composition of the underlying device can be of any suitable, and medically acceptable, design and can be made of any suitable material that is compatible with the coating itself. The surface of the medical device is provided with a coating containing one or more bioactive agents.

In order to provide a preferred coating, a coating composition is prepared to include a solvent, a combination of complementary polymers dissolved in the solvent, and the bioactive agent or agents dispersed in the polymer/solvent mixture. The solvent is preferably one in which the polymers form a true solution. The

5 pharmaceutical agent itself may either be soluble in the solvent or form a dispersion throughout the solvent. For instance, Applicant's previous US Patent No. 6,214,901 exemplifies the use of tetrahydrofuran as a solvent. While THF is certainly suitable, and at times is preferred, for certain coating compositions, Applicants have further discovered that other solvents can be used as well, in order to provide unexpected

10 advantages. These solvents include, but are not limited to, alcohols (e.g., methanol, butanol, propanol and isopropanol), alkanes (e.g., halogenated or unhalogenated alkanes such as hexane and cyclohexane), amides (e.g., dimethylformamide), ethers (e.g., THF and dioxolane), ketones (e.g., methylethylketone), aromatic compounds (e.g., toluene and xylene), nitriles (e.g., acetonitrile) and esters (e.g., ethyl acetate).

15 The resultant coating composition can be applied to the device in any suitable fashion, under conditions of controlled relative humidity, e.g., it can be applied directly to the surface of the medical device, or alternatively, to the surface of a surface-modified medical device, by dipping, spraying, or any conventional technique. In one such embodiment, for instance, the coating comprises at least two

20 layers, which are either coated under different conditions of relative humidity and/or which are themselves different. For instance, a base layer having either bioactive agent alone, or together with one or more of the polymeric components, after which one or more topcoat layers are coated, each with or without bioactive agent and/or each under different conditions of relative humidity. These different layers, in turn,

25 can cooperate in the resultant composite coating to provide an overall release profile having certain desired characteristics, and is particularly preferred for use with bioactive agents of high molecular weight. Preferably, the composition is coated onto the device surface in one or more applications. The method of applying the coating composition to the device is typically governed by the geometry of the device and

30 other process considerations. The coating is subsequently cured by evaporation of the solvent. The curing process can be performed at room temperature, elevated temperature, or with the assistance of vacuum.

The polymer mixture for use in this invention is preferably biocompatible, e.g., such that it results in no induction of inflammation or irritation when implanted. In addition, the polymer combination must be useful under a broad spectrum of both absolute concentrations and relative concentrations of the polymers. This means that
5 the physical characteristics of the coating, such as tenacity, durability, flexibility and expandability, will typically be adequate over a broad range of polymer concentrations. Furthermore, the ability of the coating to control the release rates of a variety of pharmaceutical agents can preferably be manipulated by varying the absolute and relative concentrations of the polymers.

10 A first polymer component of this invention provides an optimal combination of various structural/functional properties, including hydrophobicity, durability, bioactive agent release characteristics, biocompatibility, molecular weight, and availability.

Further examples of suitable first polymers include polyaryl(meth)acrylates,
15 polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates, in particular those with aryl groups having from 6 to 16 carbon atoms and with weight average molecular weights from about 50 to about 900 kilodaltons. Examples of polyaryl(meth)acrylates include poly-9-anthracenylmethacrylate, polychlorophenylacrylate, polymethacryloxy-2-hydroxybenzophenone,
20 polymethacryloxybenzotriazole, polynaphthylacrylate, polynaphthylmethacrylate, poly-4-nitrophenylacrylate, polypentachloro(bromo, fluoro)acrylate and methacrylate, polyphenylacrylate and methacrylate. Examples of polyaralkyl(meth)acrylates include polybenzylacrylate and methacrylate, poly-2-phenethylacrylate and methacrylate, poly-1-pyrenylmethylethylmethacrylate. Examples of polyaryloxyalkyl(meth)acrylates
25 include polyphenoxyethylacrylate and methacrylate, polyethyleneglycolphenylether acrylates and methacrylates with varying polyethyleneglycol molecular weights.

A second polymer component of this invention provides an optimal combination of similar properties, and particularly when used in admixture with the first polymer component. Examples of suitable second polymers are available
30 commercially and include poly(ethylene-co-vinyl acetate) having vinyl acetate concentrations of between about 8% and about 90%, in the form of beads, pellets,

granules, etc. pEVA co-polymers with lower percent vinyl acetate become increasingly insoluble in typical solvents.

A particularly preferred coating composition for use in this invention includes mixtures of polyalkyl(meth)acrylates (e.g., polybutyl(meth)acrylate) or aromatic
5 poly(meth)acrylates (e.g., polybenzyl(meth)acrylate) and poly(ethylene-*co*-vinyl acetate) co-polymers (pEVA). This mixture of polymers has proven useful with absolute polymer concentrations (i.e., the total combined concentrations of both polymers in the coating composition), of between about 0.05 and about 70 percent (by weight), and more preferably between about 0.25 and about 10 percent (by weight).

10 In one preferred embodiment the polymer mixture includes a first polymeric component with a weight average molecular weight of from about 100 kilodaltons to about 500 kilodaltons and a pEVA copolymer with a vinyl acetate content of from about 8 to about 90 weight percent, and more preferably between about 20 to about 40 weight percent. In a particularly preferred embodiment the polymer mixture includes
15 a first polymeric component with a molecular weight of from about 200 kilodaltons to about 400 kilodaltons and a pEVA copolymer with a vinyl acetate content of from about 30 to about 34 weight percent. The concentration of the bioactive agent or agents dissolved or suspended in the coating mixture can range from about 0.01 to about 90 percent, by weight, based on the weight of the final coating composition.

20 The bioactive (e.g., pharmaceutical) agents useful in the present invention include virtually any therapeutic substance which possesses desirable therapeutic characteristics for application to the implant site. These agents include: thrombin inhibitors, antithrombogenic agents, thrombolytic agents, fibrinolytic agents, vasospasm inhibitors, calcium channel blockers, vasodilators, antihypertensive agents,
25 antimicrobial agents, antibiotics, inhibitors of surface glycoprotein receptors, antiplatelet agents, antimetotics, microtubule inhibitors, anti secretory agents, actin inhibitors, remodeling inhibitors, antisense nucleotides, anti metabolites, antiproliferatives (including antiangiogenesis agents), anticancer chemotherapeutic agents, anti-inflammatory steroid or non-steroidal anti-inflammatory agents,
30 immunosuppressive agents, growth hormone antagonists, growth factors, dopamine agonists, radiotherapeutic agents, peptides, proteins, enzymes, extracellular matrix

components, ACE inhibitors, free radical scavengers, chelators, antioxidants, anti polymerases, antiviral agents, photodynamic therapy agents, and gene therapy agents.

A coating composition of this invention can be used to coat the surface of a variety of devices, and is particularly useful for those devices that will come in
5 contact with aqueous systems. Such devices are coated with a coating composition adapted to release bioactive agent in a prolonged and controlled manner, generally beginning with the initial contact between the device surface and its aqueous environment.

A coating composition of this invention is preferably used to coat an
10 implantable medical device that undergoes flexion or expansion in the course of its implantation or use *in vivo*. The words "flexion" and "expansion" as used herein with regard to implantable devices will refer to a device, or portion thereof, that is bent (e.g., by at least 45 degrees or more) and/or expanded (e.g., to more than twice its initial dimension), either in the course of its placement, or thereafter in the course of
15 its use *in vivo*.

Examples of suitable catheters include urinary catheters, which would benefit from the incorporation of antimicrobial agents (e.g., antibiotics such as vancomycin or norfloxacin) into a surface coating, and intravenous catheters which would benefit from antimicrobial agents and or from antithrombotic agents (e.g., heparin, hirudin,
20 coumadin). Such catheters are typically fabricated from such materials as silicone rubber, polyurethane, latex and polyvinylchloride.

The coating composition can also be used to coat stents, e.g., either self-expanding stents, which are typically prepared from nitinol, or balloon-expandable stents, which are typically prepared from stainless steel. Other stent materials, such as
25 cobalt chromium alloys, can be coated by the coating composition as well.

A coating composition of the present invention can be used to coat an implant surface using any suitable means, e.g., by dipping, spraying and the like. The suitability of the coating composition for use on a particular material, and in turn, the suitability of the coated composition can be evaluated by those skilled in the art, given
30 the present description.

The overall weight of the coating upon the surface is typically not critical. The weight of the coating attributable to the bioactive agent is preferably in the range of

about one microgram to about 10 mg of bioactive agent per cm^2 of the effective surface area of the device. By "effective" surface area it is meant the surface amenable to being coated with the composition itself. For a flat, nonporous, surface, for instance, this will generally be the macroscopic surface area itself, while for
5 considerably more porous or convoluted (e.g., corrugated, pleated, or fibrous) surfaces the effective surface area can be significantly greater than the corresponding macroscopic surface area. More preferably, the weight of the coating attributable to the bioactive is between about 0.01 mg and about 0.5 mg of bioactive agent per cm^2 of the gross surface area of the device. This quantity of drug is generally required to
10 provide adequate activity under physiological conditions.

In turn, the final coating thickness of a presently preferred coated composition will typically be in the range of about 0.1 micrometers to about 100 micrometers, and preferably between about 0.5 micrometers and about 25 micrometers. This level of coating thickness is generally required to provide an adequate concentration of drug to
15 provide adequate activity under physiological conditions.

The coated composition provides a means to deliver bioactive agents from a variety of biomaterial surfaces. Preferred biomaterials include those formed of synthetic polymers, including oligomers, homopolymers, and copolymers resulting from either addition or condensation polymerizations. Examples of suitable addition
20 polymers include, but are not limited to, acrylics such as those polymerized from methyl acrylate, methyl methacrylate, hydroxyethyl methacrylate, hydroxyethyl acrylate, acrylic acid, methacrylic acid, glyceryl acrylate, glyceryl methacrylate, methacrylamide, and acrylamide; vinyls such as ethylene, propylene, styrene, vinyl chloride, vinyl acetate, vinyl pyrrolidone, and vinylidene difluoride. Examples of
25 condensation polymers include, but are not limited to, nylons such as polycaprolactam, polylauryl lactam, polyhexamethylene adipamide, and polyhexamethylene dodecanediamide, and also polyurethanes, polycarbonates, polyamides, polysulfones, poly(ethylene terephthalate), polylactic acid, polyglycolic acid, polydimethylsiloxanes, and polyetheretherketone.

Certain natural materials are also suitable biomaterials, including human tissue such as bone, cartilage, skin and teeth; and other organic materials such as wood, cellulose, compressed carbon, and rubber. Other suitable biomaterials include metals and ceramics. The metals include, but are not limited to, titanium, stainless steel, and cobalt chromium. A second class of metals include the noble metals such as gold, silver, copper, and platinum. Alloys of metals may be suitable for biomaterials as well. The ceramics include, but are not limited to, silicon nitride, silicon carbide, zirconia, and alumina, as well as glass, silica, and sapphire. Combinations of ceramics and metals would be another class of biomaterials. Another class of biomaterials are fibrous or porous in nature. The surface of such biomaterials can be pretreated (e.g., with a Parylene coating composition) in order to alter the surface properties of the biomaterial.

Biomaterials can be used to fabricate a variety of implantable devices. General classes of suitable implantable devices include, but are not limited to, vascular devices such as grafts, stents, catheters, valves, artificial hearts, and heart assist devices; orthopedic devices such as joint implants, fracture repair devices, and artificial tendons; dental devices such as dental implants and fracture repair devices; drug delivery devices; ophthalmic devices and glaucoma drain shunts; urological devices such as penile, sphincter, urethral, bladder, and renal devices; and other catheters, synthetic prostheses such as breast prostheses and artificial organs. Other suitable biomedical devices include dialysis tubing and membranes, blood oxygenator tubing and membranes, blood bags, sutures, membranes, cell culture devices, chromatographic support materials, biosensors, and the like.

The invention will be further described with reference to the following non-limiting Examples. It will be apparent to those skilled in the art that many changes can be made in the embodiments described without departing from the scope of the present invention. Thus the scope of the present invention should not be limited to the embodiments described in this application, but only by the embodiments described by the language of the claims and the equivalents of those embodiments. Unless otherwise indicated, all percentages are by weight.

EXAMPLES

Test Methods

The potential suitability of particular coated compositions for in vivo use can be determined by a variety of methods, including the Durability, Flexibility and
5 Release Tests, examples of each of which are described herein.

Sample Preparation

One millimeter diameter stainless steel wires (e.g. 304 grade) are cut into 5 centimeter lengths. The wire segments can be treated with a Parylene C coating
10 composition (Parylene is a trademark of the Union Carbide Corporation) or evaluated with no treatment. The wire segments are weighed on a micro-balance.

Bioactive agent/polymer mixtures are prepared at a range of concentrations in an appropriate solvent, in the manner described herein. The coating mixtures are applied to respective wires, or portions thereof, by dipping or spraying, and the coated
15 wires are allowed to cure by solvent evaporation. The coated wires are re-weighed. From this weight, the mass of the coating is calculated, which in turn permits the mass of the coated polymer(s) and bioactive agent to be determined. The coating thickness can be measured using any suitable means, e.g., by the use of a microprocessor coating thickness gauge (Minitest 4100).

20 The Durability and Flexibility of the coated composition can be determined in the following manner.

Durability Test

A suitable Durability Test, involves a method in which a coated specimen
25 (e.g., wire) is subjected to repeated frictional forces intended to simulate the type of abrasion the sample would be exposed to in actual use.

The Test described below employs a repetitive 60 cycle treatment, and is used to determine whether there is any change in force measurements between the first 5 cycles and the last 5 cycles, or whether there is any observable flaking or scarring
30 detectable by scanning electron microscopy ("SEM") analysis. Regenerated cellulose membrane is hydrated and wrapped around a 200 gram stainless steel sled. The cellulose membrane is clipped tightly on the opposite side of the sled. The sled with

rotatable arm is then attached to a 250 gram digital force gauge with computer interface. The testing surface is mounted on a rail table with micro-stepper motor control. The wires are clamped onto the test surface. The cellulose covered sled is placed on top of the wires. Initial force measurements are taken as the sled moves at
5 0.5 cm/sec over a 5 cm section for 5 push/pull cycles. The sled then continues cycling over the coated samples for 50 push/pull cycles at 5 cm/sec to simulate abrasion. The velocity is then reduced to 0.5 cm/sec and the final force measurements are taken over another 5 push/pull cycles.

SEM micrographs are taken of abraded and nonabraded coated wires to
10 evaluate the effects of the abrasion on the coating.

Flexibility Test

A suitable Flexibility Test, in turn, can be used to detect imperfections (when examined by scanning electron microscopy) that develop in the course of flexing of a
15 coated specimen, and in particular, signs of cracking at or near the area of a bend.

A wire specimen is obtained and coated in the manner described above. One end of the coated wire (1.0 cm) is clamped in a bench vice. The free end of the wire (1.0 cm) is held with a pliers. The wire is bent until the angle it forms with itself is less than 90 degrees. The wire is removed from the vice and examined by SEM to
20 determine the effect of the bending on the coating.

Bioactive Agent Release Assay

A suitable Bioactive Agent Release Assay, as described herein, can be used to determine the extent and rate of drug release under physiological conditions. In
25 general it is desirable that less than 50% of the total quantity of the drug released, be released in the first 24 hours. It is frequently desirable for quantities of drug to be released for a duration of at least 30 days. After all the drug has been released, SEM evaluation should reveal an intact coating.

Except as otherwise provided herein, each coated wire is placed in a test tube
30 with 5 ml of buffer, which unless stated otherwise herein, was provided in the form of Phosphate Buffered Saline ("PBS", 10 mM phosphate, 150 mM NaCl, pH 7.4, aqueous solution).

The tubes are placed on a rack in an environmental orbital shaker and agitated at 37°C. At timed intervals, the PBS is removed from the tube and replaced with fresh PBS. The drug concentration in each PBS sample is determined using the appropriate method.

- 5 After all measurable drug has been released from the coated wire, the wire is washed with water, dried, and re-weighed, the coating thickness re-measured, and the coating quality examined by SEM analysis.

EXAMPLES

10

EXAMPLE 1

Release of Hexachlorophene from Coated Stainless Steel Wires

- A one millimeter diameter stainless steel wire (304 grade) was cut into two centimeter segments. The segments were treated with a Parylene C coating
15 composition in order to deposit a thin, conformal, polymeric coating on the wires.

- Four solutions were prepared for use in coating the wires. The solutions included mixtures of: pEVA (33 weight percent vinyl acetate, from Aldrich Chemical Company, Inc.); poly(n-butyl methacrylate "pBMA") (337,000 average molecular weight, from Aldrich Chemical Company, Inc.); and hexachlorophene ("HCP") from
20 Sigma Chemical Co., dissolved in tetrahydrofuran. The solutions were prepared as follows:

- 1) 10 mg/ml pEVA//60mg/ml pBMA//100mg/ml HCP
- 2) 35 mg/ml pEVA//35mg/ml pBMA//100mg/ml HCP
- 3) 60 mg/ml pEVA//10mg/ml pBMA//100mg/ml HCP
- 25 4) 0 mg/ml pEVA//0mg/ml pBMA//100mg/ml HCP

- Nine wire segments were coated with each coating solution. The following protocol was followed for coating the wire segments. The Parylene-treated wire segments were wiped with an isopropyl alcohol dampened tissue prior to coating. The wire segments were dipped into the coating solution using a 2cm/second dip
30 speed. The wire segments were immediately withdrawn from the coating solution at a rate of 1cm/second, after which the coated segments were air-dried at room temperature.

Individual wire segments were placed in tubes containing 2 ml of phosphate buffered saline ("PBS", pH 7.4). The tubes were incubated at 37 degrees centigrade on an environmental, orbital shaker at 100 rotations/minute. The PBS was changed at 1 hour, 3 hours, and 5 hours on the first day, and daily thereafter. The PBS samples
5 were analyzed for HCP concentration by measuring the absorbance of the samples at 298 nms on a UV/visible light spectrophotometer and comparing to an HCP standard curve.

Results are provided in Figure 1 of US Patent 6,214,901, which demonstrates the ability to control the release rate of a pharmaceutical agent from a coated surface
10 by varying the relative concentrations of a polymer mixtur described by this invention.

EXAMPLE 2

The polymers described in this disclosure have been evaluated using an Assay
15 protocol as outlined above. The polymer mixtures evaluated have ranged from 100% pBMA to 100% pEVA. Representative results of those evaluations are summarized below.

Control coatings that are made up entirely of pBMA are very durable showing no signs of wear in the Durability Test. When subjected to the Flexibility Test,
20 however, these coatings develop cracks, particularly in the presence of significant concentrations of drug. These coatings also release drug very slowly.

Control coatings that are made up entirely of pEVA, in contrast, are less durable and show no signs of cracking in the Flexibility Test, but develop significant scarring in the Durability Test. These coatings release drugs relatively rapidly,
25 usually releasing more than 50% of the total within 24 hours.

These coatings , which contain a mixture of both polymers, are very durable, with no signs of wear in the Durability Test and no cracking in the Flexibility Test. Drug release from these coatings can be manipulated by varying the relative concentrations of the polymers. For instance, the rate of drug release can be
30 controllably increased by increasing the relative concentration of pEVA.

Bioactive agent containing coatings which show no signs of scarring in the Durability Test and no cracking in the Flexibility Test possess the characteristics

necessary for application to implantable medical devices that undergo flexion and/or expansion in the course of implantation and/or use.

EXAMPLE 3

5 Three different polymer solutions, each at a concentration of 35 mg/ml, were prepared in 1,3-dioxolane in the manner provided below in order to provide coating compositions in the form of one part systems. The first solution contained poly(n-butyl methacrylate), with approximate weight average molecular weight of 337 kilodaltons; the second solution contained poly(ethylene-co-vinylacetate), with a vinyl acetate
10 content of 60 % (w/w) and poly(benzyl methacrylate) ("PEVA60/P[benzyl]MA"), in a polymer ratio of (50/50 % w/w), respectively. The poly(n-butyl methacrylate) and poly(ethylene-co-vinylacetate) were purified by extraction with organic solvents to remove impurities, e.g., monomer residues. The third solution contained poly(ethylene-co-vinylacetate) with a vinyl acetate content of 60 % (w/w) and
15 poly(methyl methacrylate-co-n-butyl methacrylate) ("PEVA60/P[Methyl-co-n-Butyl]MA"), commercially available and known as poly(methyl methacrylate/n-butyl methacrylate), in a polymer ratio of (50/50 % w/w), respectively. Vincristine sulfate and some additional 1,3-dioxolane were added to each of the three solutions in order to provide coating compositions in the form of one part systems (at final
20 concentrations of 17.5 mg/ml). The vincristine/polymer ratio was 30/70 % (w/w).

Sample preparation

 Sixteen-millimeter diameter stainless steel discs with an overall thickness of two millimeters were fabricated with a fourteen-millimeter diameter flat pedestal.
25 The pedestal had a surface area of 1.54 cm². A surface treatment such as Parylene could be applied to the disc or the surface could be left untreated. The discs were weighed on a microbalance.

 Polymer solutions containing vincristine sulfate were applied to the pedestal surface of the discs with a pipette. Two coats were applied with drying of the coat
30 between applications. The solvent was evaporated from the discs and the discs were re-weighed on a microbalance to obtain the amount of vincristine sulfate per disc.

Bioactive Agent Release Assay

A suitable Bioactive Agent Release Assay, as described herein, can be used to determine the extent and rate of bioactive agent release. In general it is desirable that less than 50 % of the total quantity of the bioactive agent be released in the first 24
5 hours. It is frequently desirable for quantities of bioactive agent to be released for a duration of at least 30 days.

Except as otherwise provided herein, each coated disc was placed in an amber vial with 4 mls of elution solvent. The elution solvent was composed of 50 % methanol and 50 % PBS. The vials were placed in a water bath and stirred at 37 °C.
10 At time intervals, the disc was removed from the vial, placed into a new vial containing fresh elution solvent and the new vial was placed into the water bath to continue the experiment. The bioactive agent concentration in each elution solvent sample was determined using UV spectroscopy.

After all measurable bioactive agent was released from the coated disc; the
15 disc was washed with water, dried and re-weighed to determine the weight loss of the disc.

Conclusions

Results are provided in Figure 1, where it can be seen that approximately 80 %
20 or more of the vincristine sulfate was released within 1 day for coatings that contained either poly(n-butyl methacrylate) or a blend of poly(methyl methacrylate-co-n-butyl methacrylate) and poly(ethylene-co-vinylacetate). The blend containing poly(benzyl methacrylate) and poly(ethylene-co-vinylacetate) showed sustained controlled release of vincristine sulfate for more than a one-month period.

25

HUMIDITY EXAMPLES

Two examples are provided using two different bioactive agents, namely, β -estradiol, as an example of a low molecular weight bioactive agent that weighs 272 daltons, and tetramethylrhodamine isothiocyanate-Dextran (dextran-TRITC) as an
30 example of a water soluble, high molecular weight bioactive agent that weighs 4400 daltons.

EXAMPLE 4

Solution preparation – dextran

Two solutions were prepared in order to provide a coating composition in the form of a two part system. The first solution was an aqueous solution containing the
5 bioactive agent, dextran-TRITC, at a concentration of 15 mg/ml. The second solution contained poly(ethylene-co-vinylacetate) with a vinyl acetate concentration of 33 % (w/w) and poly(n-butyl methacrylate), with approximate weight average molecular weight of 337 kilodaltons. The poly(n-butyl methacrylate) and poly(ethylene-co-vinylacetate) were purified by extraction with organic solvents to remove impurities,
10 e.g., monomer residues. The polymers of the second solution were dissolved in tetrahydrofuran at a concentration of 10 mg/ml.

Sample preparation

Fifteen-millimeter diameter stainless steel discs with an overall thickness of
15 two millimeters were fabricated with a nine-millimeter diameter flat pedestal. The pedestal had a surface area of 0.64 cm^2 . A surface treatment such as Parylene could be applied to the disc or the surface could be left untreated. The discs were weighed on a microbalance. The aqueous bioactive agent solution was applied to the pedestal surface of the discs with a pipette. The water evaporated from the discs and the discs
20 were re-weighed on a microbalance to obtain the amount of the bioactive agent on the disc. The polymer coating solution containing poly(ethylene-co-vinylacetate) and poly(n-butyl methacrylate) was applied to the entire surface of the disc, covering the dextran. The polymer coating solution was coated under a range of humidity conditions. The tetrahydrofuran evaporated from the discs and the coatings were
25 dried under vacuum. The discs were weighed a third time to obtain the amount of the polymer coating per disc.

Bioactive Agent Release Assay

A suitable Bioactive Agent Release Assay, as describe herein, can be used to
30 determine the extent and rate of bioactive agent release under physiological conditions. In general it is desirable that less than 50 % of the total quantity of the

bioactive agent be released in the first 24 hours. It is frequently desirable for quantities of bioactive agent to be released for a duration of at least 30 days.

Except as otherwise provided herein, each coated disc was placed in an amber vial with 4 mls of PBS. The vials were placed in a water bath and stirred at 37 °C. At
5 time intervals, the disc was removed from the vial, placed into a new vial containing fresh PBS and the new vial was placed into the water bath to continue the experiment. The concentration of bioactive agent in each PBS sample was determined using UV spectroscopy.

After all measurable bioactive agent was released from the coated disc; the
10 disc was washed with water, dried, and re-weighed to determine the weight loss of the disc.

Conclusion

The results are provided in Figure 2 below, where it can be seen that the
15 relative humidity at which the polymeric topcoat composition was coated can be used to control the release rate of the bioactive agent coated in an underlying layer. The bioactive agent was released at a faster rate from the composite coating where the topcoat was coated at 48 % relative humidity than from the polymer topcoat coating that was coated at 10 % relative humidity.

20

EXAMPLE 5

Solution Preparation β -estradiol

A polymer coating solution containing poly(ethylene-co-vinylacetate) with a
25 vinyl acetate concentration of 33 % (w/w) and poly(n-butyl methacrylate) was prepared in tetrahydrofuran at a polymer ratio of 14/86 % (w/w), respectively. β -estradiol was added to the polymer coating solution after dissolution of the polymer in order to provide a coating composition in the form a one part system . The bioactive agent/polymer ratio of the β -estradiol containing polymer solution was 30/70 % (w/w)
30 at a concentration of 10 mg/ml.

Sample preparation

Eighteen-millimeter long, electropolished stainless steel stents with a 2 mm outer diameter were fabricated (Lasera Technology Corporation, Waukegan IL). A surface treatment such as Parylene could be applied to the stent or the surface could be left untreated. The stents were weighed on a microbalance. The β -estradiol containing polymer solution was coated (e.g., sprayed) onto stainless steel stents in an environment maintained at 0, 20, 30 or 40 % relative humidity at 22 °C. The stents were re-weighed after drying on a microbalance to obtain the amount of the β -estradiol per stent.

Bioactive Agent Release Assay

A suitable Bioactive Agent Release Assay, as described herein, can be used to determine the extent and rate of bioactive agent release under physiological conditions. In general it is desirable that less than 50 % of the total quantity of the bioactive agent be released in the first 24 hours. It is frequently desirable for quantities of bioactive agent to be released for a duration of at least 30 days.

Except as otherwise provided herein, each coated stent was placed in an amber vial with 1.6 mls of PBS. The vials were placed in a water bath and stirred at 37 °C. At time intervals, the stent was removed from the vial, placed into a new vial containing fresh PBS and the new vial was placed into the water bath to continue the experiment. The concentration of β -estradiol in each PBS sample was determined using UV spectroscopy.

Conclusion

The results are provided in Figure 3 below, where it can be seen that the coating of the stents under different humidity level conditions can be used to control the β -estradiol rate of release from coatings containing poly(ethylene-co-vinylacetate) and poly(n-butyl methacrylate).

CLAIMS

What is claimed is:

1. A coating composition comprising a bioactive agent in combination
5 with a plurality of polymers, including a first polymer component comprising at least one polyalkyl(meth)acrylate or aromatic poly(meth)acrylate polymer and a second polymer component comprising poly(ethylene-co-vinyl acetate).
2. A composition according to claim 1 wherein the first polymer
composition comprises a polymer selected from the group consisting of
10 polyaryl(meth)acrylates, polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates.
3. A composition according to claim 1 wherein the first polymer
component is selected from the group consisting of: polyaryl(meth)acrylates,
polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates with aryl groups
15 having from 6 to 16 carbon atoms, having a weight average molecular weight of about 50 to about 900 kilodaltons.
4. A composition according to claim 2 wherein the
polyaryl(meth)acrylates are selected from the group consisting of poly-9-
anthracenylmethacrylate, polychlorophenylacrylate, polymethacryloxy-2-
20 hydroxybenzophenone, polymethacryloxybenzotriazole, polynaphthylacrylate,
polynaphthylmethacrylate, poly-4-nitrophenylacrylate, polypentachloro(bromo,
fluoro)acrylate and methacrylate, polyphenylacrylate and methacrylate, the
polyaralkyl(meth)acrylates are selected from the group consisting of
polybenzylacrylate and methacrylate, poly-2-phenethylacrylate and methacrylate,
25 poly-1-pyrenylmethylethylmethacrylate, and the polyaryloxyalkyl(meth)acrylates are
selected from the group consisting of polyphenoxyethylacrylate and methacrylate,
polyethyleneglycolphenylether acrylates and methacrylates.
5. A composition according to claim 2 wherein the second polymer
component is selected from the group consisting of poly(ethylene-co-vinyl acetate)
30 polymers having vinyl acetate concentrations of between about 8 % and about 90 %
by weight.

6. A composition according to claim 5 wherein the vinyl acetate concentrations are between about 20 % and about 40 % by weight.

7. A composition according to claim 1 wherein the composition is provided in a form selected from the group of solution, emulsion, mixture, dispersion
5 or blend.

8. A composition according to claim 7 wherein the total combined concentrations of both polymers in the composition is between about 0.05 % and about 70 % by weight.

9. A composition according to claim 2 wherein the first polymeric
10 component has a weight average molecular weight of from about 100 kilodaltons to about 500 kilodaltons and the poly(ethylene-co-vinyl acetate) has a vinyl acetate content of from about 20 % to about 40 % by weight.

10. A composition according to claim 9 wherein the bioactive agent is dissolved or suspended in the coating composition at a concentration of about 0.01 %
15 to about 90 % by weight and is selected from the group consisting of thrombin inhibitors, antithrombogenic agents, thrombolytic agents, fibrinolytic agents, vasospasm inhibitors, calcium channel blockers, vasodilators, antihypertensive agents, antimicrobial agents, antibiotics, inhibitors of surface glycoprotein receptors, antiplatelet agents, antimitotics, microtubule inhibitors, anti secretory agents, actin
20 inhibitors, remodeling inhibitors, antisense nucleotides, anti metabolites, antiproliferatives, anticancer chemotherapeutic agents, anti-inflammatory steroid or non-steroidal anti-inflammatory agents, immunosuppressive agents, growth hormone antagonists, growth factors, dopamine agonists, radiotherapeutic agents, peptides, proteins, enzymes, extracellular matrix components, inhibitors, free radical
25 scavengers, chelators, antioxidants, anti polymerases, antiviral agents, photodynamic therapy agents, and gene therapy agents.

11. A method of coating a device with a bioactive agent, the method comprising the steps of providing a composition according to claim 1 and applying the composition to the device.

30 12. A method according to claim 11 wherein the coating is provided upon a surface of an implanted medical device under conditions in which humidity is controlled either by controlling the humidity at which the device is coated with the

composition and/or by controlling the water content of the coating or coated composition itself.

13. A method according to claim 11 wherein the composition is provided upon a surface of an implanted medical device and comprises a plurality of coating
5 compositions, each independently coated under conditions of controlled humidity.

14. A method according to claim 11 wherein the device is one that undergoes flexion and/or expansion in the course of implantation or use *in vivo*.

15. A method according to claim 11 wherein the first polymer component is selected from the group consisting of: polyaryl(meth)acrylates,
10 polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates with aryl groups having from 6 to 16 carbon atoms, having a weight average molecular weight of about 50 to about 900 kilodaltons.

16. A method according to claim 15 wherein the polyaryl(meth)acrylates are selected from the group consisting of poly-9-anthracenylmethacrylate,
15 polychlorophenylacrylate, polymethacryloxy-2-hydroxybenzophenone, polymethacryloxybenzotriazole, polynaphthylacrylate, polynaphthylmethacrylate, poly-4-nitrophenylacrylate, polypentachloro(bromo, fluoro)acrylate and methacrylate, polyphenylacrylate and methacrylate, the polyaralkyl(meth)acrylates are selected from the group consisting of polybenzylacrylate and methacrylate, poly-2-
20 phenethylacrylate and methacrylate, poly-1-pyrenylmethylemethacrylate, and the polyaryloxyalkyl(meth)acrylates are selected from the group consisting of polyphenoxyethylacrylate and methacrylate, polyethyleneglycolphenylether acrylates and methacrylates.

17. A method according to claim 12 wherein the coating composition is
25 coated onto the device under relative humidity controlled at a level of between about 0 % and about 95 % relative humidity.

18. A method according to claim 11 wherein the second polymer component is selected from the group consisting of poly(ethylene-co-vinyl acetate) polymers having vinyl acetate concentrations of between about 8 % and about 90 %
30 by weight.

19. A method according to claim 18 wherein the vinyl acetate concentrations are between about 20 % and about 40 % by weight.

20. A method according to claim 11 wherein the composition is provided in a form selected from the group of solution, emulsion, mixture, dispersion or blend.

5 21. A method according to claim 20 wherein the total combined concentrations of both polymers in the composition is between about 0.05 % and about 70 % by weight.

22. A method according to claim 20 wherein the first polymeric component has a weight average molecular weight of from about 100 kilodaltons to about 500 kilodaltons and the poly(ethylene-co-vinyl acetate) has a vinyl acetate content of from about 20 % to about 40 % by weight.

23. A method according to claim 22 wherein the first polymeric component has a weight average molecular weight of from about 200 kilodaltons to about 400 kilodaltons and the poly(ethylene-co-vinyl acetate) has a vinyl acetate content of from about 30 % to about 34 % by weight.

24. A method according to claim 11 wherein the bioactive agent is dissolved or suspended in the coating composition at a concentration of about 0.01 % to about 90 % by weight.

25. A method according to claim 24 wherein the bioactive agent is selected from the group consisting of thrombin inhibitors, antithrombogenic agents, thrombolytic agents, fibrinolytic agents, vasospasm inhibitors, calcium channel blockers, vasodilators, antihypertensive agents, antimicrobial agents, antibiotics, inhibitors of surface glycoprotein receptors, antiplatelet agents, antimitotics, microtubule inhibitors, anti secretory agents, actin inhibitors, remodeling inhibitors, antisense nucleotides, anti metabolites, antiproliferatives, anticancer chemotherapeutic agents, anti-inflammatory steroid or non-steroidal anti-inflammatory agents, immunosuppressive agents, growth hormone antagonists, growth factors, dopamine agonists, radiotherapeutic agents, peptides, proteins, enzymes, extracellular matrix components, inhibitors, free radical scavengers, chelators, antioxidants, anti polymerases, antiviral agents, photodynamic therapy agents, and gene therapy agents.

26. A method according to claim 12 wherein the bioactive agent is dissolved or suspended in the coating composition at a concentration of about 0.01 % to about 90 % by weight.

27. A method according to claim 26 wherein the bioactive agent is selected
5 from the group consisting of thrombin inhibitors, antithrombogenic agents, thrombolytic agents, fibrinolytic agents, vasospasm inhibitors, calcium channel blockers, vasodilators, antihypertensive agents, antimicrobial agents, antibiotics, inhibitors of surface glycoprotein receptors, antiplatelet agents, antimitotics, microtubule inhibitors, anti secretory agents, actin inhibitors, remodeling inhibitors,
10 antisense nucleotides, anti metabolites, antiproliferatives, anticancer chemotherapeutic agents, anti-inflammatory steroid or non-steroidal anti-inflammatory agents, immunosuppressive agents, growth hormone antagonists, growth factors, dopamine agonists, radiotherapeutic agents, peptides, proteins, enzymes, extracellular matrix components, inhibitors, free radical scavengers,
15 chelators, antioxidants, anti polymerases, antiviral agents, photodynamic therapy agents, and gene therapy agents.

28. A method according to claim 18 wherein the bioactive agent is dissolved or suspended in the coating composition at a concentration of about 0.01 % to about 90 % by weight.

29. A method according to claim 28 wherein the bioactive agent is selected
20 from the group consisting of thrombin inhibitors, antithrombogenic agents, thrombolytic agents, fibrinolytic agents, vasospasm inhibitors, calcium channel blockers, vasodilators, antihypertensive agents, antimicrobial agents, antibiotics, inhibitors of surface glycoprotein receptors, antiplatelet agents, antimitotics, microtubule inhibitors, anti secretory agents, actin inhibitors, remodeling inhibitors,
25 antisense nucleotides, anti metabolites, antiproliferatives, anticancer chemotherapeutic agents, anti-inflammatory steroid or non-steroidal anti-inflammatory agents, immunosuppressive agents, growth hormone antagonists, growth factors, dopamine agonists, radiotherapeutic agents, peptides, proteins, enzymes, extracellular matrix components, inhibitors, free radical scavengers,
30 chelators, antioxidants, anti polymerases, antiviral agents, photodynamic therapy agents, and gene therapy agents.

30. A combination comprising a device coated with a composition according to the method of claim 11, the combination being adapted to provide controlled release of the bioactive agent when positioned in an aqueous environment.

31. A combination according to claim 30 wherein the device is an
5 implantable medical device that that undergoes flexion and/or expansion in the course of implantation or use *in vivo*, and the surface is coated with a plurality of coating compositions, each independently coated under conditions of controlled humidity.

32. A combination according to claim 30 wherein the first polymer component is selected from the group consisting of polyaryl(meth)acrylates,
10 polyalkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates with aryl groups having from 6 to 16 carbon atoms, having a weight average molecular weight of about 50 to about 900 kilodaltons,

and the second polymer component is selected from the group consisting of poly(ethylene-co-vinyl acetate) polymers having vinyl acetate concentrations of
15 between about 8 % and about 90 % by weight.

33. A combination according to claim 32 wherein the total combined concentrations of both polymers in the composition is between about 0.05 % and about 70 % by weight, and the bioactive agent is dissolved or suspended in the coating composition at a concentration of about 0.01 % to about 90 % by weight.

20 34. A combination according to claim 33 wherein the device is selected from the group consisting of catheters and stents.

35. A combination according to claim 34 wherein the catheter is selected from the group consisting of urinary catheters and intravenous catheters.

36. A combination according to claim 30 wherein the weight of the coating
25 attributable to the bioactive agent is in the range of about one microgram to about 10 mg of bioactive agent per cm² of the gross surface area of the device.

37. A combination according to claim 36 wherein the weight of the coating attributable to the bioactive agent is between about 0.01 mg and about 0.5 mg of bioactive agent per cm² of the gross surface area of the device, and the coating
30 thickness of the composition is in the range of about 0.1 micrometers to about 100 micrometers.

38. A method of using a combination of claim 30, the method comprising the steps of positioning the device *in vivo* under aqueous conditions suitable to permit the device to release the bioactive agent *in situ*.

39. A method according to claim 38 wherein the first polymer component
5 is selected from the group consisting of polyaryl(meth)acrylates, polyaralkyl(meth)acrylates, and polyaryloxyalkyl(meth)acrylates with aryl groups having from 6 to 16 carbon atoms, having a weight average molecular weight of about 50 to about 900 kilodaltons,

and the second polymer component is selected from the group consisting of
10 poly(ethylene-co-vinyl acetate) polymers having vinyl acetate concentrations of between about 8 % and about 90 % by weight.

40 A method according to one of claims 11, 24, or 38 wherein the composition further comprises a solvent in which the polymers form a true solution.

41. A method according to one of claims 11, 24 or 38 wherein the device
15 comprises a biomaterial selected from the group consisting of acrylics, vinyls, nylons, polyurethanes, polycarbonates, polyamides, polysulfones, poly(ethylene terephthalate), polylactic acid, polyglycolic acid, polydimethylsiloxanes, and polyetheretherketones, natural organic materials, metals, ceramics, glass, silica, and sapphire.


20 42. A method according to claim 41 wherein the acrylics are selected from methyl acrylate, methyl methacrylate, hydroxyethyl methacrylate, hydroxyethyl acrylate, acrylic acid, methacrylic acid, glyceryl acrylate, glyceryl methacrylate, methacrylamide, and acrylamide, the vinyls are selected from ethylene, propylene, styrene, vinyl chloride, vinyl acetate, vinyl pyrrolidone, and vinylidene difluoride, the
25 nylons are selected from polycaprolactam, polylauryl lactam, polyhexamethylene adipamide, and polyhexamethylene dodecanediamide, the organic materials are selected from human tissue, wood, cellulose, compressed carbon, and rubber, the metals are selected from titanium, stainless steel, cobalt chromium, gold, silver, copper, and platinum and their alloys, and the ceramics are selected from silicon
30 nitride, silicon carbide, zirconia, and alumina, including combinations of such biomaterials.

43. A method according to one of claims 11, 24 or 38 wherein the device is selected from the group consisting of vascular devices, orthopedic devices, dental devices, drug delivery devices, ophthalmic devices, glaucoma drain shunts, urological devices, synthetic prostheses, dialysis tubing and membranes, blood oxygenator
5 tubing and membranes, blood bags, sutures, membranes, cell culture devices, chromatographic support materials, and biosensors.

44. A method according to claim 43 wherein the vascular devices are selected from grafts, stents, catheters, valves, artificial hearts, and heart assist devices, the orthopedic devices are selected from joint implants, fracture repair devices, and
10 artificial tendons, the dental devices are selected from dental implants and fracture repair devices, and the urological devices are selected from penile, sphincter, urethral, bladder, and renal devices.


1/3

Figure 1

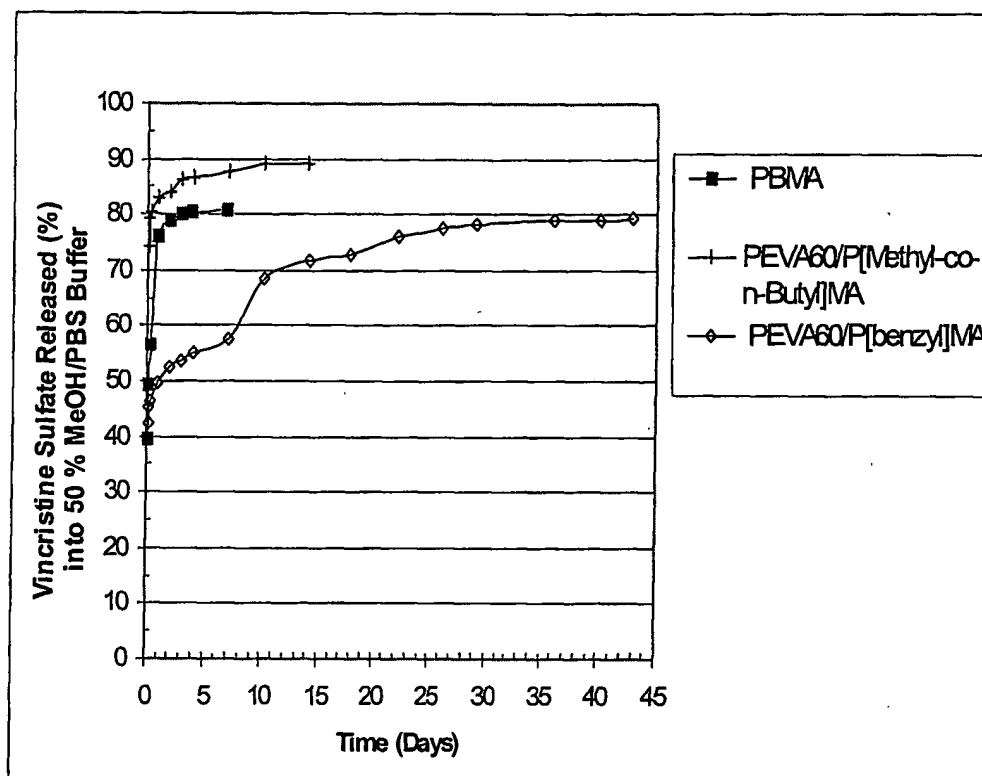


2/3

Figure 2

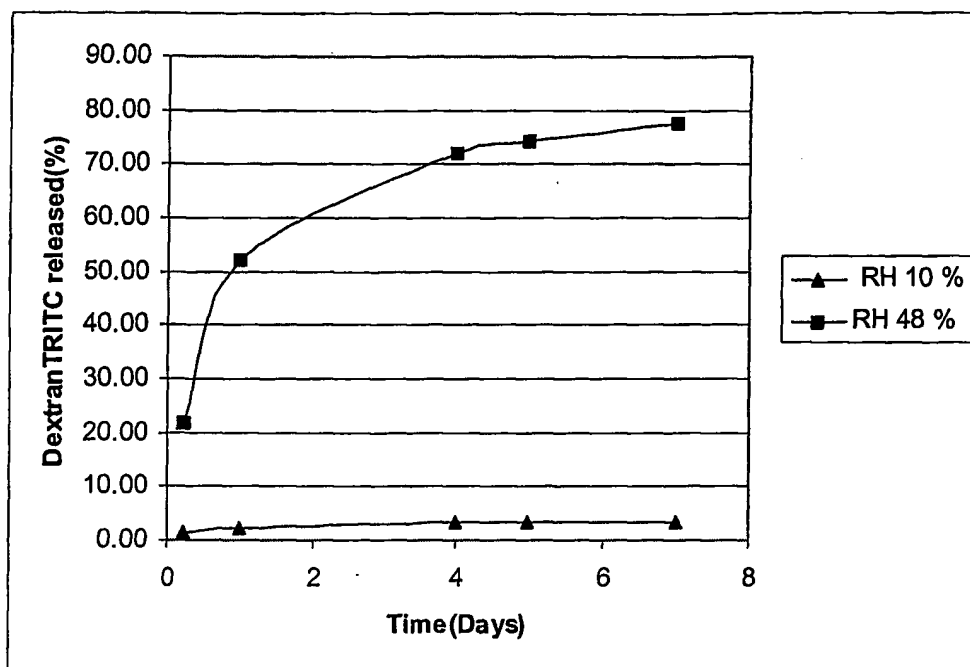

3/3

Figure 3

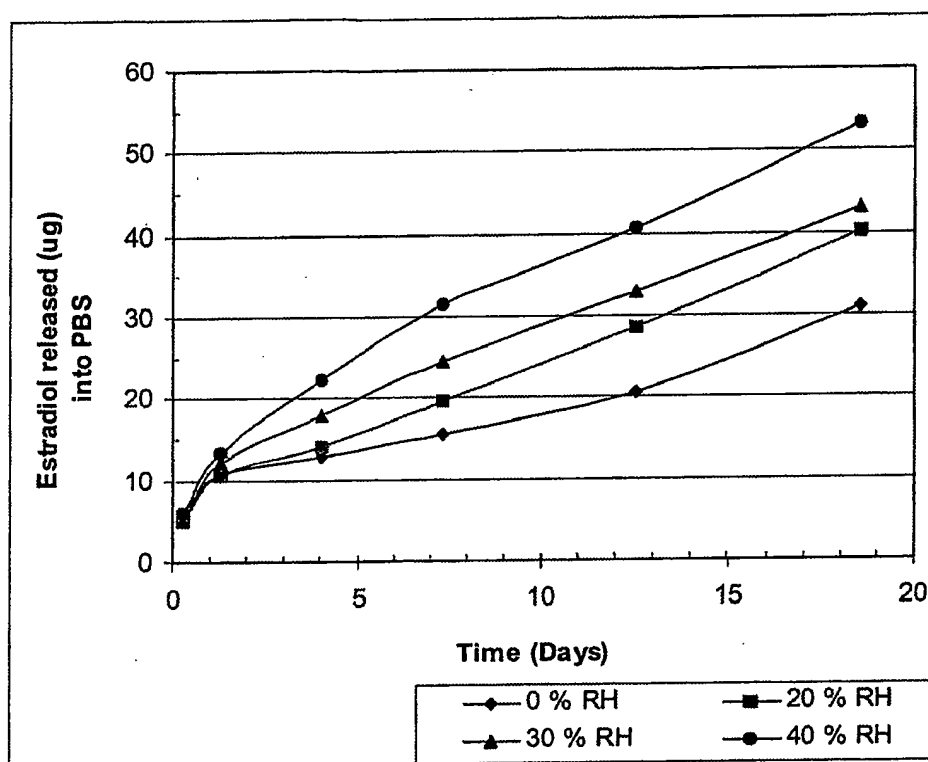

INTERNATIONAL SEARCH REPORT

Internati Application No

PCT/US 03/19343

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61L27/34 A61L27/54 A61L31/10 A61L29/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data, BIOSIS, EMBASE, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 344 035 B1 (CHUDZIK STEPHEN J ET AL) 5 February 2002 (2002-02-05) cited in the application	1-44
Y	the whole document	12, 13, 17, 31
X	WO 02 26139 A (CORDIS CORP) 4 April 2002 (2002-04-04) page 20, line 9 -page 22, line 14 page 38, line 22 -page 41, line 31 figure 23 claims	1-44
Y	US 6 129 933 A (CHASIN MARK ET AL) 10 October 2000 (2000-10-10) column 8, line 58 -column 9, line 19 claims 25-27	12, 13, 17, 31
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

28 October 2003

Date of mailing of the international search report

05/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Fey-Lamprecht, F

INTERNATIONAL SEARCH REPORT

Internatic pplication No

PCT/US 03/19343

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	US 2002/188037 A1 (CHUDZIK STEPHEN J ET AL) 12 December 2002 (2002-12-12) cited in the application the whole document ---	1-44
P,X	US 2003/083646 A1 (SIRHAN MOTASIM ET AL) 1 May 2003 (2003-05-01) page 3, left-hand column, line 23 - line 37 page 4, right-hand column, line 29 - line 49 page 15, left-hand column, line 10 - line 26 figures 4,5 claims ---	1-44
P,X	US 2002/120326 A1 (MICHAL GENE) 29 August 2002 (2002-08-29) page 2, right-hand column, line 32 - line 53 claims 16-29 -----	1-44

INTERNATIONAL SEARCH REPORT

Internatlc pplication No

PCT/US 03/19343

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6344035	B1	05-02-2002	US 6214901 B1 10-04-2001
			US 2002188037 A1 12-12-2002
			US 2003031780 A1 13-02-2003
			US 2002032434 A1 14-03-2002
			AT 219693 T 15-07-2002
			AU 760408 B2 15-05-2003
			AU 3563899 A 16-11-1999
			CA 2320259 A1 04-11-1999
			DE 69901927 D1 01-08-2002
			DE 69901927 T2 10-10-2002
			DK 1019111 T3 14-10-2002
			EP 1174157 A1 23-01-2002
			EP 1019111 A1 19-07-2000
			ES 2179646 T3 16-01-2003
			JP 3406903 B2 19-05-2003
			JP 2002512856 T 08-05-2002
			PT 1019111 T 31-10-2002
			WO 9955396 A1 04-11-1999
WO 0226139	A	04-04-2002	US 2001029351 A1 11-10-2001
			US 2002165608 A1 07-11-2002
			US 2002133183 A1 19-09-2002
			AU 1129902 A 08-04-2002
			AU 1132102 A 08-04-2002
			AU 7730201 A 11-04-2002
			AU 9316101 A 08-04-2002
			AU 9486901 A 08-04-2002
			CA 2357881 A1 29-03-2002
			CA 2424029 A1 04-04-2002
			CA 2424038 A1 04-04-2002
			CA 2424049 A1 04-04-2002
			CA 2425753 A1 04-04-2002
			EP 1192957 A2 03-04-2002
			EP 1335761 A1 20-08-2003
			EP 1322235 A1 02-07-2003
			EP 1322351 A1 02-07-2003
			EP 1322342 A1 02-07-2003
			JP 2002238994 A 27-08-2002
			WO 0226280 A1 04-04-2002
			WO 0226139 A1 04-04-2002
			WO 0226281 A1 04-04-2002
			WO 0226271 A1 04-04-2002
			US 2002094440 A1 18-07-2002
			US 2002111590 A1 15-08-2002
			US 2002051730 A1 02-05-2002
			CA 2408754 A1 22-11-2001
			EP 1280571 A1 05-02-2003
			WO 03000308 A1 03-01-2003
			US 2003065377 A1 03-04-2003
			US 2003065345 A1 03-04-2003
			US 2003065346 A1 03-04-2003
US 6129933	A	10-10-2000	US 5681585 A 28-10-1997
			US 5958459 A 28-09-1999
			US 5273760 A 28-12-1993
			US 2003054032 A1 20-03-2003
			US 6316031 B1 13-11-2001
			US 6103261 A 15-08-2000

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/19343

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6129933	A	US 6143322 A	07-11-2000
		AT 172376 T	15-11-1998
		AU 722358 B2	27-07-2000
		AU 5299598 A	26-03-1998
		AU 716793 B2	09-03-2000
		AU 5299998 A	26-03-1998
		AU 6605894 A	12-01-1995
		AU 6610594 A	12-01-1995
		CA 2126611 A1	02-01-1995
		CA 2127166 A1	02-01-1995
		CN 1102323 A	10-05-1995
		CN 1103289 A	07-06-1995
		CZ 9401550 A3	18-01-1995
		CZ 9401601 A3	15-03-1995
		DE 69414046 D1	26-11-1998
		DE 69414046 T2	22-04-1999
		DK 636370 T3	28-06-1999
		EG 20650 A	31-10-1999
		EP 1243269 A2	25-09-2002
		EP 0631781 A1	04-01-1995
		EP 0636370 A1	01-02-1995
		ES 2124372 T3	01-02-1999
		FI 943141 A	02-01-1995
		FI 943168 A	02-01-1995
		HU 75164 A2	28-04-1997
		HU 70938 A2	28-11-1995
		IL 109944 A	06-12-1998
		IL 110014 A	30-11-1999
		JP 7145056 A	06-06-1995
		JP 7149648 A	13-06-1995
		KR 140492 B1	01-06-1998
		NO 942470 A	02-01-1995
		NO 942477 A	02-01-1995
		NZ 260825 A	26-01-1996
		NZ 260883 A	24-06-1997
		NZ 280243 A	24-06-1997
		PL 304060 A1	09-01-1995
		PL 304062 A1	09-01-1995
		SG 50706 A1	20-07-1998
		SK 76394 A3	09-08-1995
		SK 78694 A3	08-02-1995
		SK 283082 B6	04-02-2003
		TW 450814 B	21-08-2001
		US 6294195 B1	25-09-2001
US 2002188037	A1	US 2002032434 A1	14-03-2002
		US 6344035 B1	05-02-2002
		US 6214901 B1	10-04-2001
		US 2003031780 A1	13-02-2003
US 2003083646	A1	US 2002082679 A1	27-06-2002
		WO 03009777 A2	06-02-2003
		WO 03009778 A2	06-02-2003
		WO 03009779 A2	06-02-2003
		WO 03037223 A1	08-05-2003
		US 2003033007 A1	13-02-2003
		US 2003050692 A1	13-03-2003
		US 2003139801 A1	24-07-2003

INTERNATIONAL SEARCH REPORT

International application No
PCT/US 03/19343

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003083646 A1		WO 02056790 A2	25-07-2002
US 2002120326 A1	29-08-2002	NONE	